



ARC-1204A IR Repeater Kit



Features

- Six emitter output connections.
- Convenient IR confirmation LED.
- Status power receptacle with LED indicator.
- Power receptacle with LED indicator.
- Three conductor 1/8" receptacle for interfacing with many brands of freestanding IR receivers.

Specifications

Connecting Block


- Six emitter output connections
- Convenient IR confirmation LED
- Status power receptacle with LED indicator
- 3 conductor 1/8" receptacle for interfacing with many brands of free standing IR receivers
- Compact size for mounting near audio equipment
- 82 (W) x 60 (H) x 27 (D) mm
- 110 g

IR Target

- CFL friendly – allows installation in areas with compact fluorescent lighting.
- Blue IR confirmation LED
- Wide band IR
- 3 m cable with 3.5 mm stereo mini plug
- Receive Frequency Range: 34 kHz ~ 60 kHz
- Transmit Frequencies: 38 kHz ~ 56 kHz
- Range: 12 meters @ 38 kHz, 7.6 meters @ 56kHz
- Power: 12V DC 30mA max.
- 45 (L) x 14 (W) x 13 (H) mm
- Cord Length: 3 meters
- Connector Type: 3.5mm TRS mini plug

IR Emitter

- Round shape, with elegant & compact size
- Transparent housing
- 10ft cable length
- 3.5mm standard mono plug
- With self-adhesive tape for quick and easy fixing on any hard, clean and dry surface
- 12 V 200 mA power supply

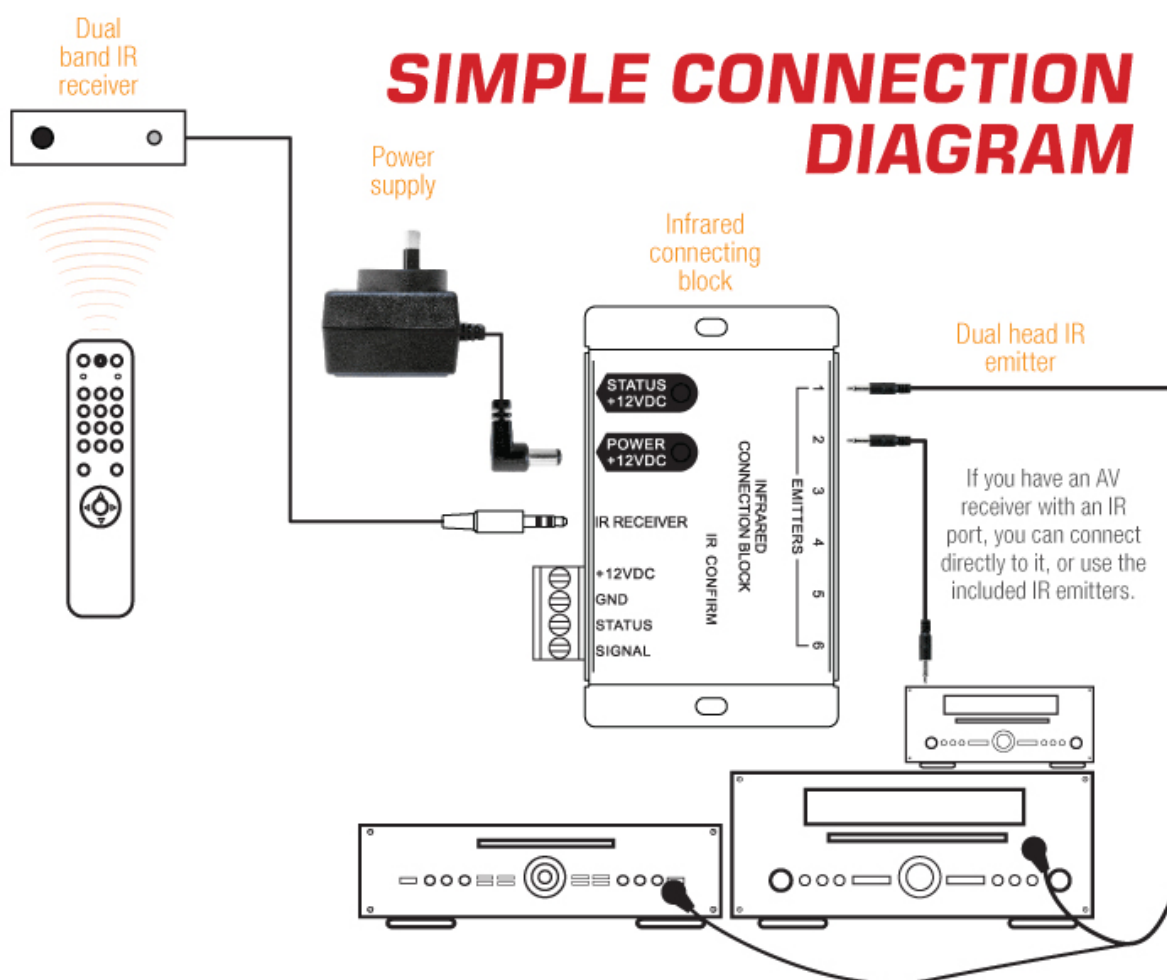

ARC-1178A IR Target to ARC-1204A Wiring Diagram

