



 AUDIO

 VIDEO

 SECURITY

# **ARC-SP182 UHD 1x2 HDMI Splitter**

**User manual**

**V1.0ep**

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

## **I. Introduction**

This 1 by 2 HDMI UHD Splitter with HDCP 2.2 is an advanced solution for splitting a single HDMI input to two HDMI outputs. It provides high performance audio and video output through HDMI cables up to 4K2K@60Hz (YUV444) resolution and is capable of receiving and transmitting up to 18Gbps of bandwidth with no data loss. Supporting the latest features you can be assured of reliable and high quality HDMI distribution.

## **II. Features**

1. Compliant with HDMI2.0, HDCP2.2 and DVI 1.0;
2. Support video format up to 4k2k@30Hz with 24bit RGB/YcbCR 4:4:4/YCBCR 4:2:2, and up to 4k2k@60Hz with 12bit YCBCR 4:4:4;

3. Support 3D frame sequential video format up to 1080p@60;
4. Support high resolution VESA mode video format up to QSXGA@60Hz;
5. Supports LPCM 7.1CH, Dolby TrueHD, and DTS-HD Master Audio;
6. Supports smart EDID control;

### III. Package

- |    |                             |     |
|----|-----------------------------|-----|
| 1. | UHD 1x2 HDMI Splitter ----- | 1PC |
| 2. | 5V1A DC Power adapter ----- | 1PC |
| 3. | Operation Manual -----      | 1PC |


### IV. Specifications

- |    |                   |  |
|----|-------------------|--|
| 1. | Video Bandwidth   | 600MHz/18Gbps                            |
| 2. | Input Ports       | 1 × HDMI (Female type)                   |
| 3. | Output Ports      | 2 × HDMI (Female type),                  |
| 4. | Output Resolution | 480i ~1080p50/60, 4Kx2K@24/30, 4k2k@60Hz |

5.	ESD Protection	Human Body model: $\pm 8$ kV (air-gap discharge) $\pm 4$ kV (contact discharge)
8.	Power Supply	5V/1A DC (US/EU standards, CE/FCC/UL certified)
9.	Dimensions	56 mm (W) $\times$ 100 mm (D) $\times$ 16 mm (H)
10.	Weight	165 g
11.	Chassis Material	Metal
12.	Operating Temperature	0 °C~40 °C/ 32 °F~104 °F
13.	Storage Temperature	-20 °C ~ 60 °C/-4 °F ~140 °F
14.	Relative Humidity	20~90 % RH (non-condensing)
15.	Power Consumption (Max)	5W

## V. Operation controls and Functions

### Front Panel & Rear Panel

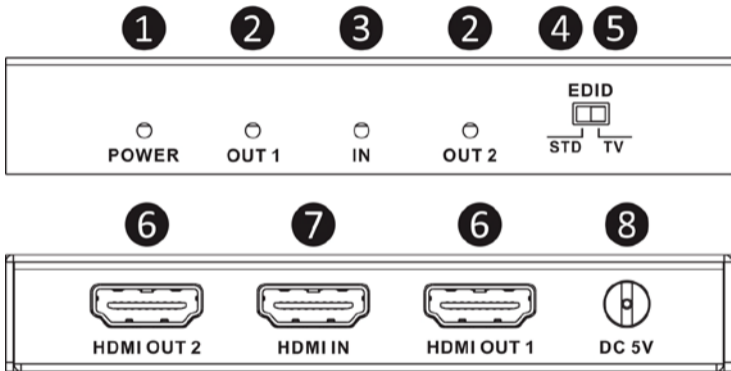

1. **POWER LED:** This blue LED illuminates when the device is connected with power supply.
2. **OUT LED:** These blue LEDs will light up to indicate which HDMI outputs are connected to

an active TV/display/monitor.

3. **IN LED:** This blue LED illuminate when the Source connected to the device.
4. **EDID STD:** When in 'STD' mode, the unit will use its own built-in EDID settings. In this mode, the video output will be set to 1080p@60Hz and the audio output at LPCM 2CH Stereo. Use this mode if there are display problems in TV Mode.
5. **EDID TV:** When in 'TV' mode, the unit will read the EDID settings of the display device connected to HDMI OUT 1. If it detects a 4K2K capable EDID setting it will transmit the signal in that format to all outputs. If no 4K2K capable EDID is detected then the unit will output the best resolution that all displays can support.
6. **HDMI OUT 1~2:** Connect each of the HDMI outputs to an HDMI display for simultaneous HDMI distribution, or cascade the output to another transmitter to extend the operating distance.
7. **HDMI IN:** Connect the input port to the HDMI or DVI output of your source device such as a

DVD player or set-top box with an HDMI cable.

- DC 5V:** Plug the 5V DC power supply into the unit and connected the adaptor to an AC outlet.

## VI. Application Example

