




SLK-1 Single Line Keypad

Product Brief

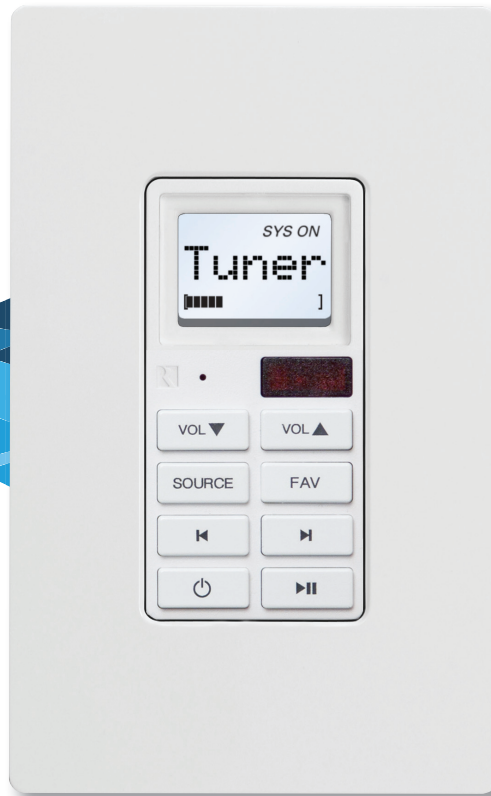

The SLK-1 Single Line Keypad is an in-wall Decora® style single-gang keypad designed for individual zone control of an MCA-C3 or MCA-C5 Multizone Controller Amplifier.

The SLK-1 uses a five character LCD to display the current source, volume level and system status. Designed for basic zone control, its white backlit, soft-touch

buttons allow for easy access to volume, power and source selection as well as a zone specific favorite and simple source transport option – play/pause, previous and next.

For added convenience, you can turn the whole system on or off and the SLK-1 features an IR receiver for control and IR repeating.

Standard Features

5 Character LCD shows source name, volume level and system status

Single-gang Decora®-style keypad design exclusively for the MCA-C3 and MCA-C5 controllers

Conversion kits available in 5 color options

Responsive easy to use buttons & visual feedback for simple control



SLK-1 Back Panel

Specifications	
Cable Connection	RJ-45, CAT-5 (T568A standard)
Power Requirements	12 VDC 180mA CAT-5
Dimensions	Inside Standard Single-gang J-Box 1.87" W x 2.7" D x 1.47" H (4.7 x 6.9 x 3.7 cm)
Max cable length	300' (91 m) CAT-5
Fits UL/CSA Approved single-gang junction box	

