

Amplified 5.25" In-Ceiling Speakers with Bluetooth

It allows you to wirelessly stream audio from your portable device (iPod, iPad, iPhone, iPod Touch, Bluetooth unit etc.) To your Kitchen, Bathroom and every room


Control your music with freedom, no need to be connected to a docking station.

Simply use your smart device to control on/off, volume, tracks etc.

The built-in amplifier auto-senses a Bluetooth sync to working mode or Stand-by mode.

Initial Pairing to your Bluetooth In-Ceiling Speakers

Here, We take the iPhone for example, Other Bluetooth enabled devices will follow the Bluetooth settings instruction.

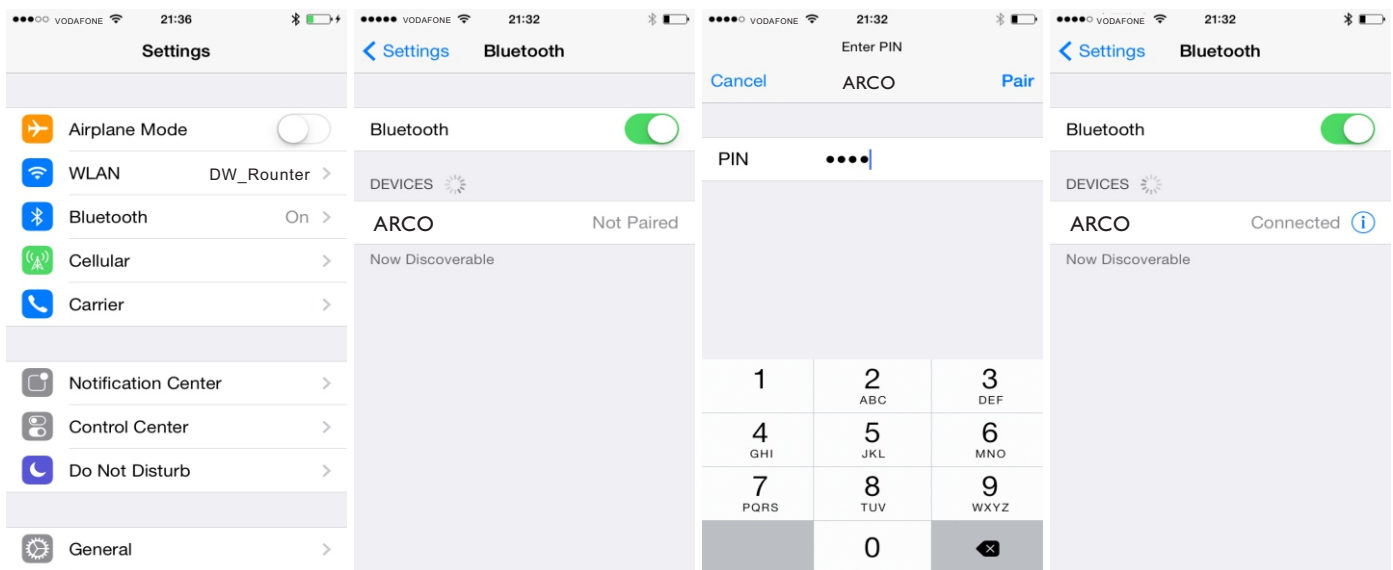

- 1** In home page, Open "Settings" Select "Bluetooth"
- 2** Open "Bluetooth" Search devices, Select the "ARCO"
- 3** Enter PIN Code: "0000"
- 4** Connected

Instructions (Disconnecting / Changing Connected Device) :

If you want to switch from your iPad, iPod touch, iPhone other Bluetooth enabled to an others device, Please kindly follow below steps:

1. Enter to Bluetooth setting and turn the Bluetooth function to "OFF".
2. The Bluetooth In-Ceiling Speaker can be connected to a different device now.
3. Follow the directions in "Initial pairing to your Bluetooth In-Ceiling Speaker" connect to different device.


Tips:

If you move out of range > 10m or turn off the Bluetooth function on your iPad, iPod touch, iPhone, or any other Bluetooth enabled device, the Bluetooth In-Ceiling Speaker will disconnect. To reconnect your devices, simply access the "Settings" icon on the Home Screen of your devices, Tap the "Bluetooth On" option, select the "ARCO" device, No need enter the PIN code.

Amplified 5.25" In-Ceiling Speakers with Bluetooth



- A** DC Input: DC 12-20V \oplus \ominus
- B** Bluetooth V4.0
- C** 2 x 45W RMS Class "D" Digital Amplifier
- D** Speaker Terminals (Right--RED \oplus)
- E** Speaker Terminals (Right--BLACK \ominus)
- F** External Audio Input

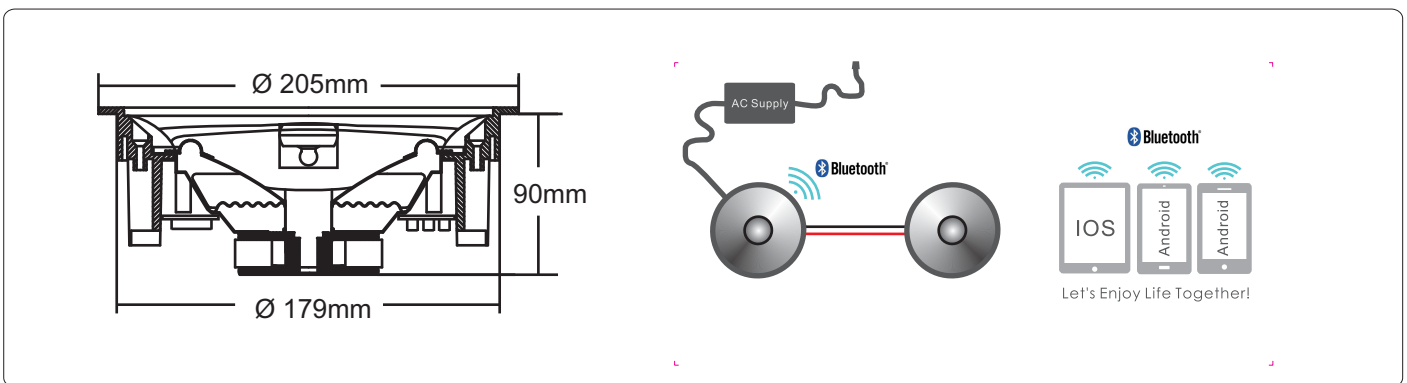

AMP Technical Specifications:

Power Requirements:

AC Supply: AC 100-240V, 60 / 50Hz, 1 A
DC Input: DC 12-20V @ 5A

Standby Current:

Typical 40mA

Frequency Response:

20Hz to 35KHz (\pm 3dB)

Speaker Impedance:

8 ohms - 4 ohms minimum

Output Power (RMS):

2CH x 45Watt @ 4 ohms

Auxiliary Input:

AUX (3.81 mm Connector)

Bluetooth Technical Specifications:

Bluetooth System: Bluetooth V4.0 Version
Frequency Range: 2.40GHz-2.4832GHz (ISM Band)
RF Channels: 79 Channels
Receiver sensitivity: -90 dBm
Range: Up to 10 Metres
ID Name: ARCO
Security: 4-Digit PIN Code "0000"

Speaker Technical Specifications:

Rated Power: 30 W
Rated impedance: 8 ohm
Frequency Range: 50Hz-35KHz (-6dB)
Sensitivity: 91 \pm 2d B
Cut Out Hole: 179mm
Dimension: 205mm
Mounting Depth: 90mm
Enclosure Material: ABS
Protrusion: 4mm
Speaker Unit: 1" swirl loaded titanium dome tweeter, 5.25" glass fiber cone bass/midrange

Package Includes:

- 1 x 5.25" Amplified Bluetooth In-Ceiling Speaker
- 1 x 5.25" In-Ceiling Speaker
- 1 x Power adaptor